
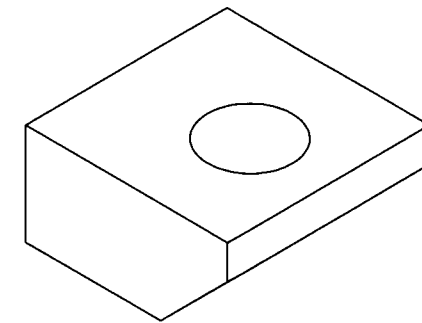


D

C

B

A

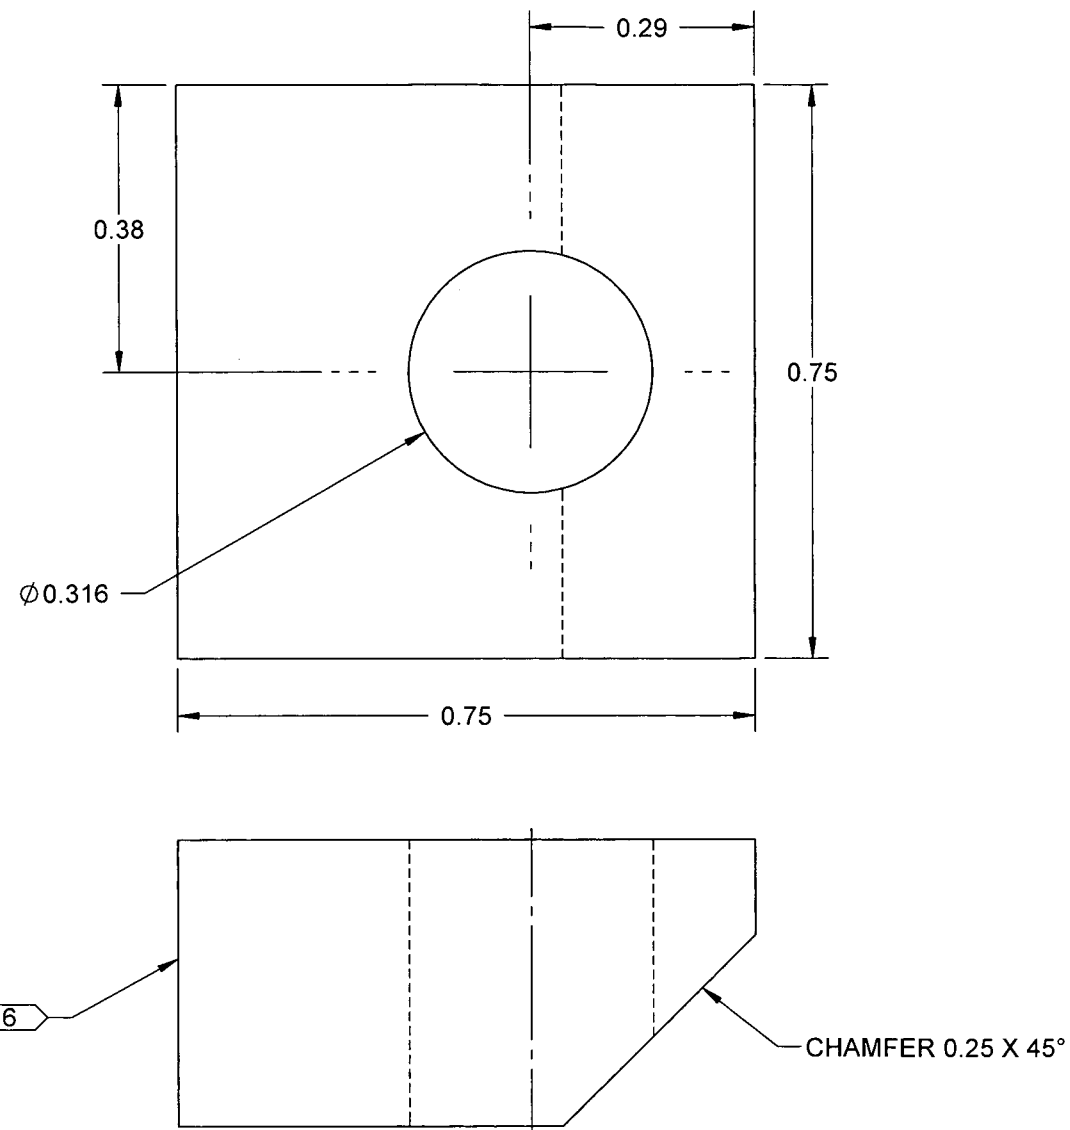

D

C

B

A

D4040-1 RADIUS BLOCK**NOTES:**

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR, 0.375 THICK
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B0.375
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D4040-1" AND B/N USING FINE POINT PERMANENT INK MARKER
- 7) WEIGHT: 0.02 lbs

RELEASED
2010-04-14
MP

A	NEW ISSUE	DES	09.12.11
REV.	DESCRIPTION		DATE
DESIGN	DES	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	DES		
CHECKED	DES 13	DRAWING NO.	REV. A
MFG. APPR.	DES	D4040	SHEET 1 OF 1
APPROVED	DES 140	TITLE	SCALE
DE APPR.	DES	RADIUS BLOCK	NTS
DATE	09.12.11	COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	